



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: HP #221
Standard: EN300 220(TX)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 433MHz
Model: RFM96-433S2(13dBm)
Manufacturer:

Polarization: Horizontal
Power Source: DC 3.3V
Date: 13/12/30/
Time: 14/54/43
Engineer Signature: PEI
Distance: 3m

Note:

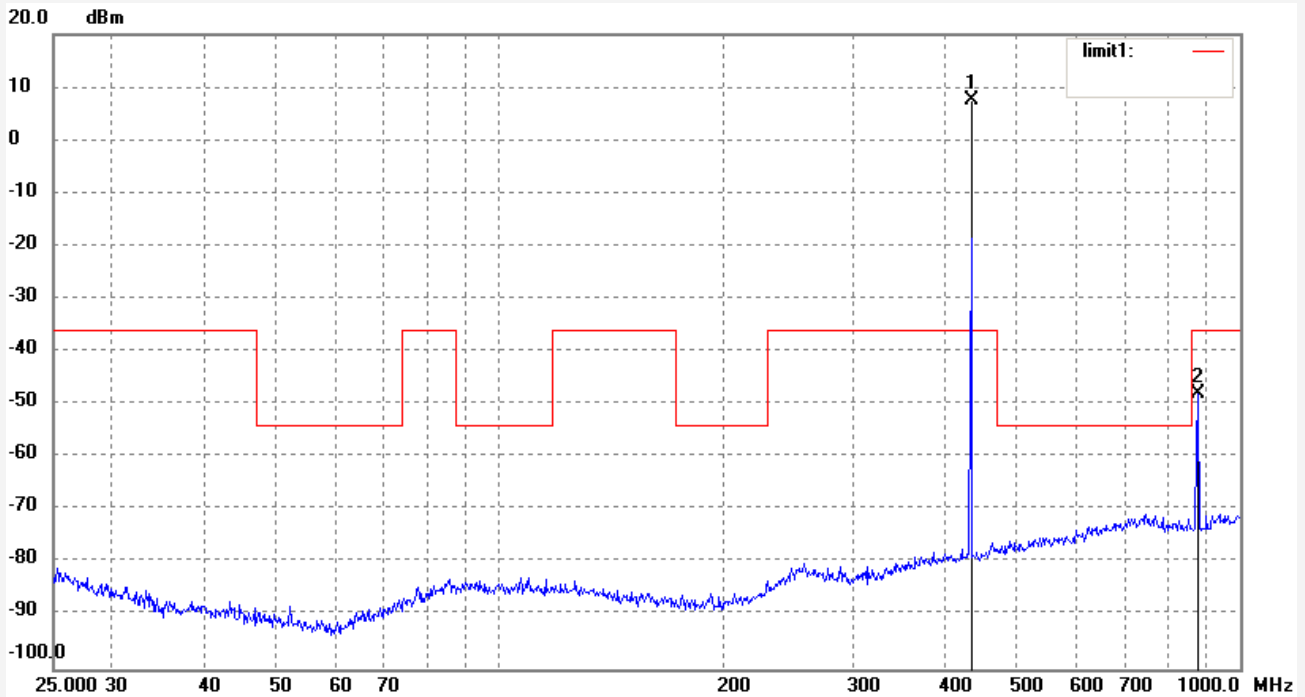

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	433.7194	4.61	3.00	7.61	-36.00	43.61	peak			
2	878.6490	-56.46	8.63	-47.83	-36.00	-11.83	peak			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: HP #222
Standard: EN300 220(TX)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 433MHz
Model: RFM96-433S2(13dBm)
Manufacturer:

Polarization: Vertical
Power Source: DC 3.3V
Date: 13/12/30/
Time: 14/55/43
Engineer Signature: PEI
Distance: 3m

Note:

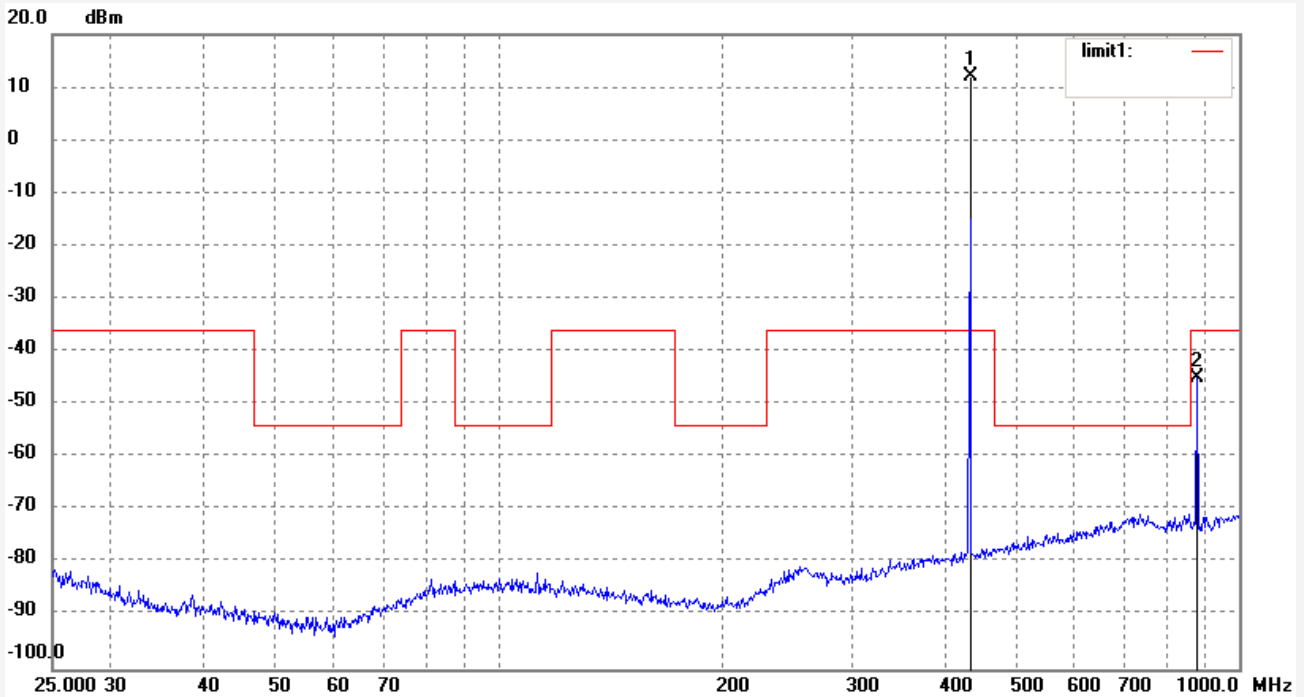

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	433.7194	9.99	2.16	12.15	-36.00	48.15	peak			
2	878.6490	-53.21	8.16	-45.05	-36.00	-9.05	peak			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: HP #242
Standard: EN300 220(TX)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 433MHz
Model: RFM96-433S2(13dBm)
Manufacturer:

Polarization: Horizontal
Power Source: DC 3.3V
Date: 2013/12/30
Time: 15:55:24
Engineer Signature: PEI
Distance: 3m

Note:

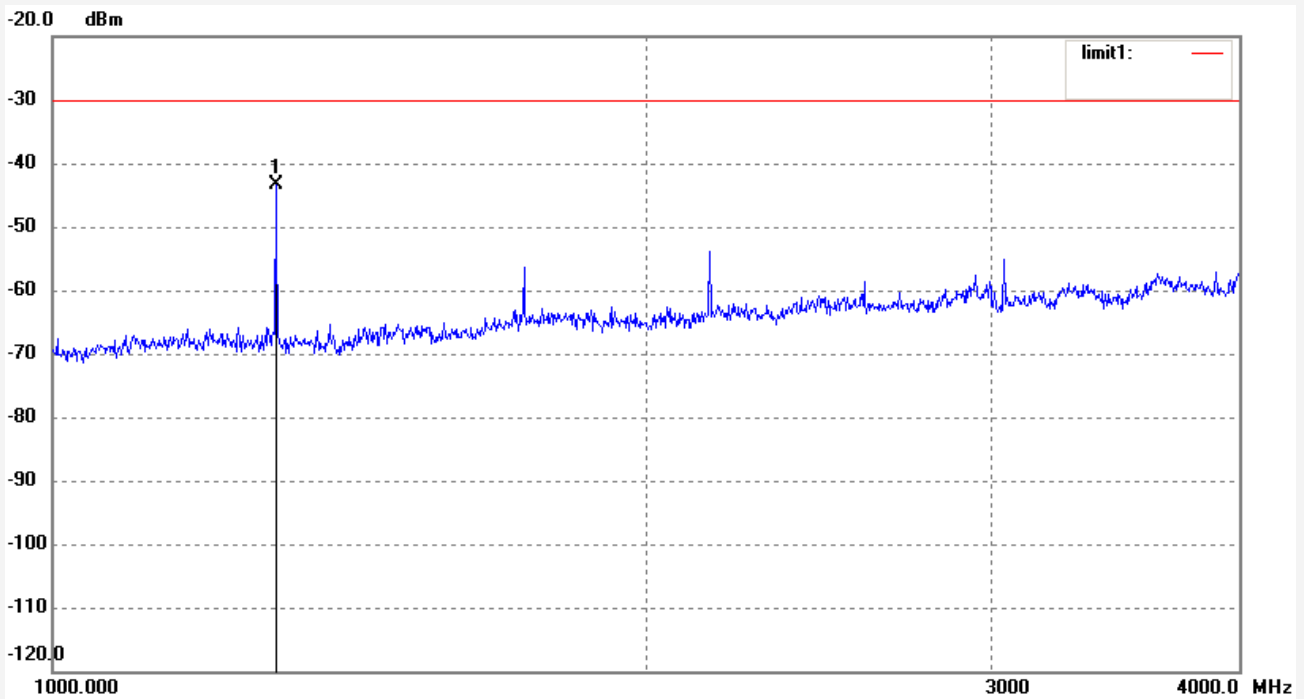

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1297.970	-40.07	-3.31	-43.38	-30.00	-13.38	peak			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: HP #243
Standard: EN300 220(TX)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 433MHz
Model: RFM96-433S2(13dBm)
Manufacturer:

Polarization: Vertical
Power Source: DC 3.3V
Date: 2013/12/30
Time: 15:58:38
Engineer Signature: PEI
Distance: 3m

Note:

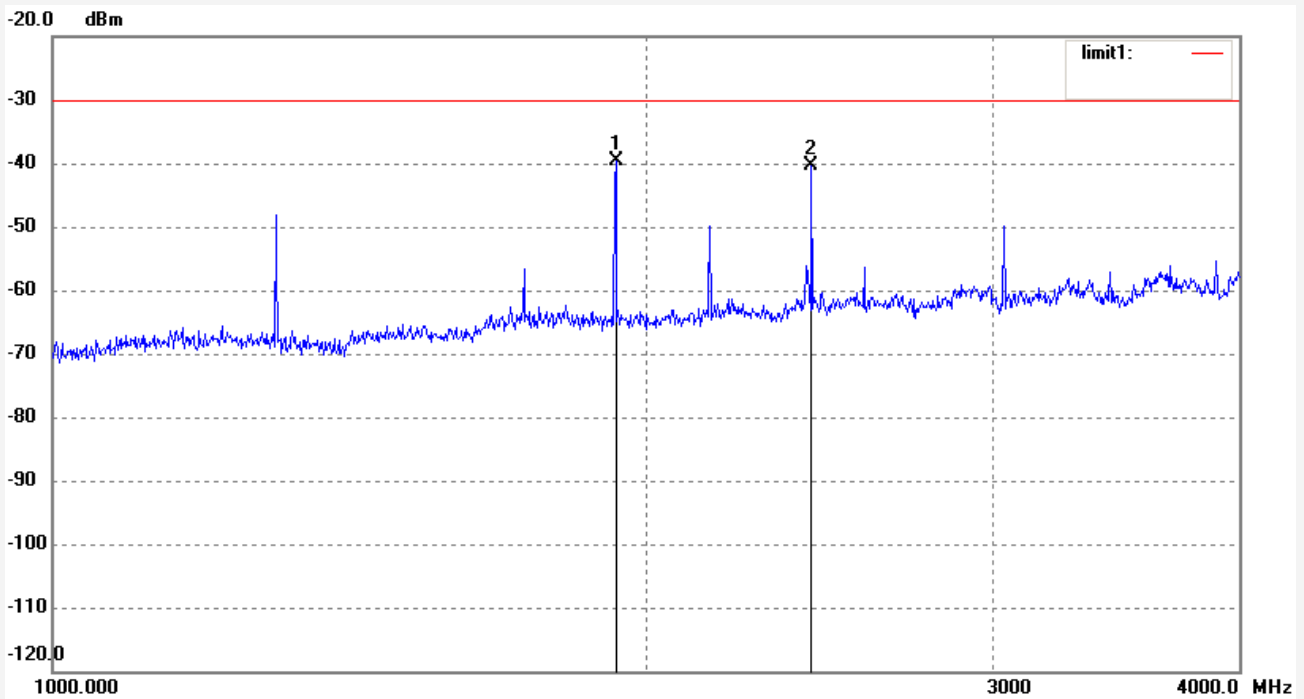

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1931.469	-39.49	-0.17	-39.66	-30.00	-9.66	peak			
2	2427.848	-42.72	2.36	-40.36	-30.00	-10.36	peak			