



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: HP #260
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 433MHz
Model: RFM96-433S2(13dBm)
Manufacturer:

Polarization: Horizontal
Power Source: DC 3.3V
Date: 2013/12/30
Time: 16:41:02
Engineer Signature: PEI
Distance: 3m

Note:

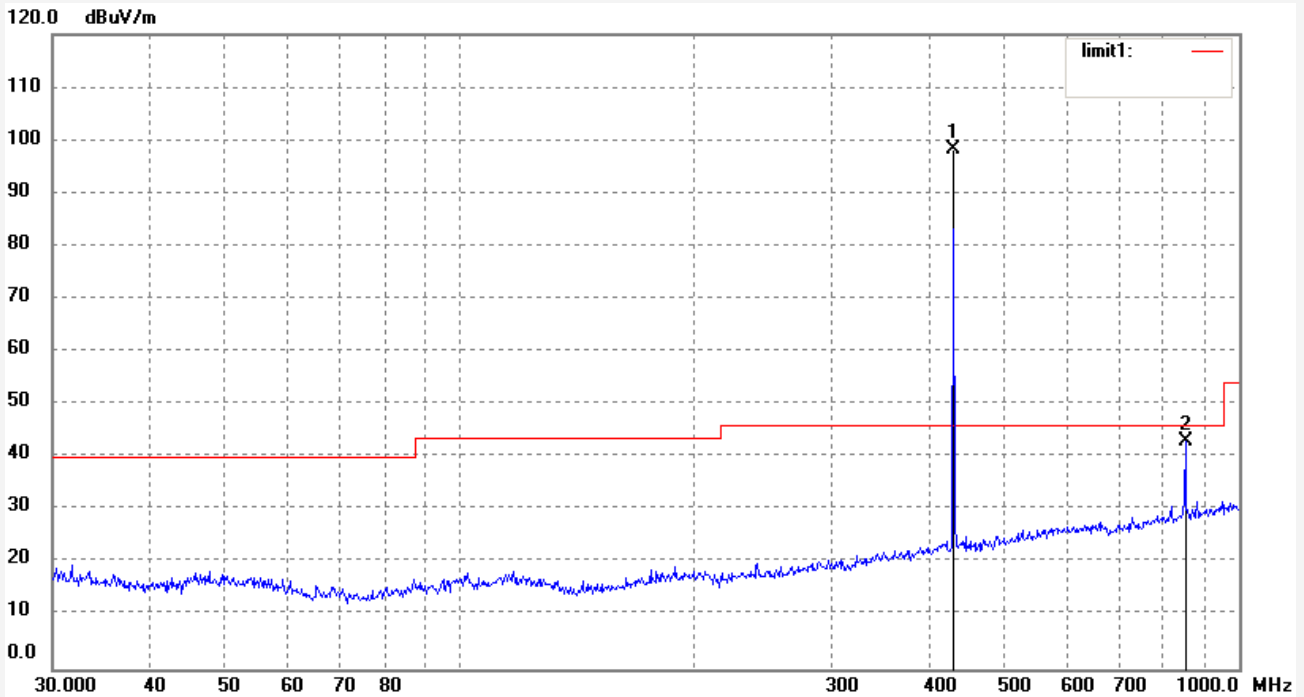

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	430.3053	104.21	-6.03	98.18	46.00	52.18	peak			
2	853.7546	42.31	0.74	43.05	46.00	-2.95	peak			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: HP #261
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 433MHz
Model: RFM96-433S2(13dBm)
Manufacturer:

Polarization: Vertical
Power Source: DC 3.3V
Date: 2013/12/30
Time: 16:42:35
Engineer Signature: PEI
Distance: 3m

Note:

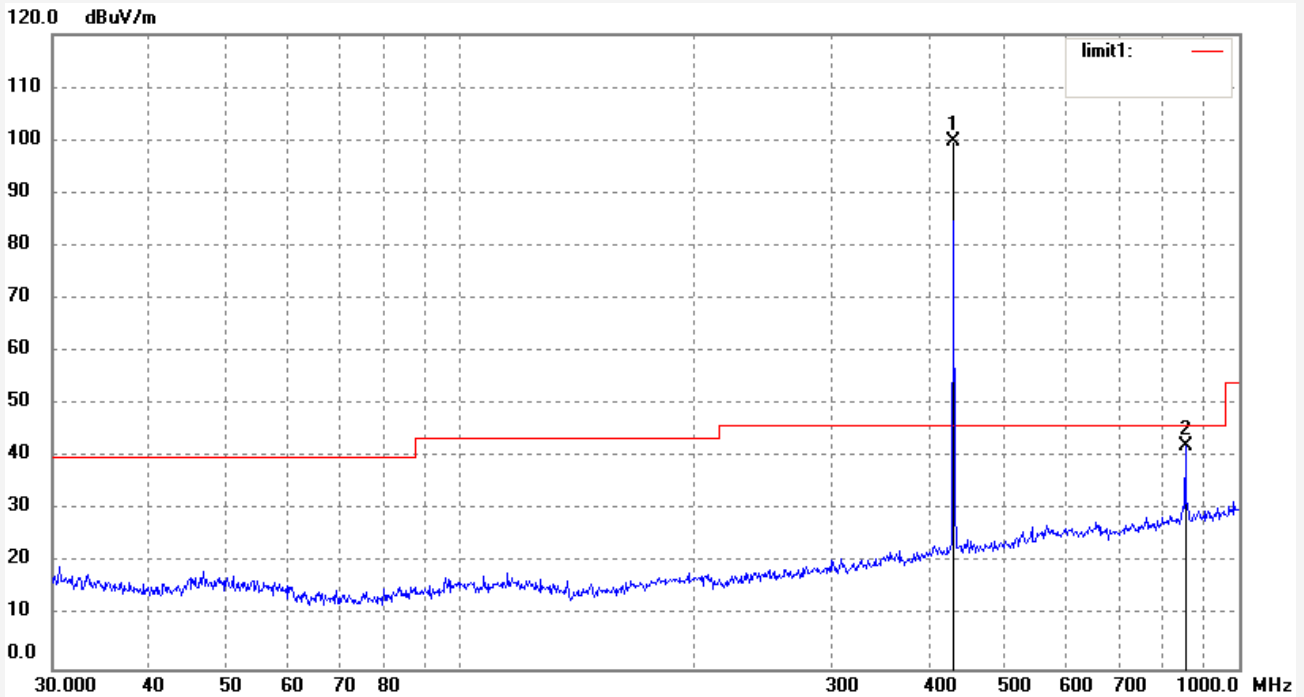

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	430.3053	105.75	-6.03	99.72	46.00	53.72	peak			
2	853.7546	41.40	0.74	42.14	46.00	-3.86	peak			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: HP #258
Standard: FCC PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 433MHz
Model: RFM96-433S2(13dBm)
Manufacturer:

Polarization: Horizontal
Power Source: DC 3.3V
Date: 2013/12/30
Time: 16:35:14
Engineer Signature: PEI
Distance: 3m

Note:

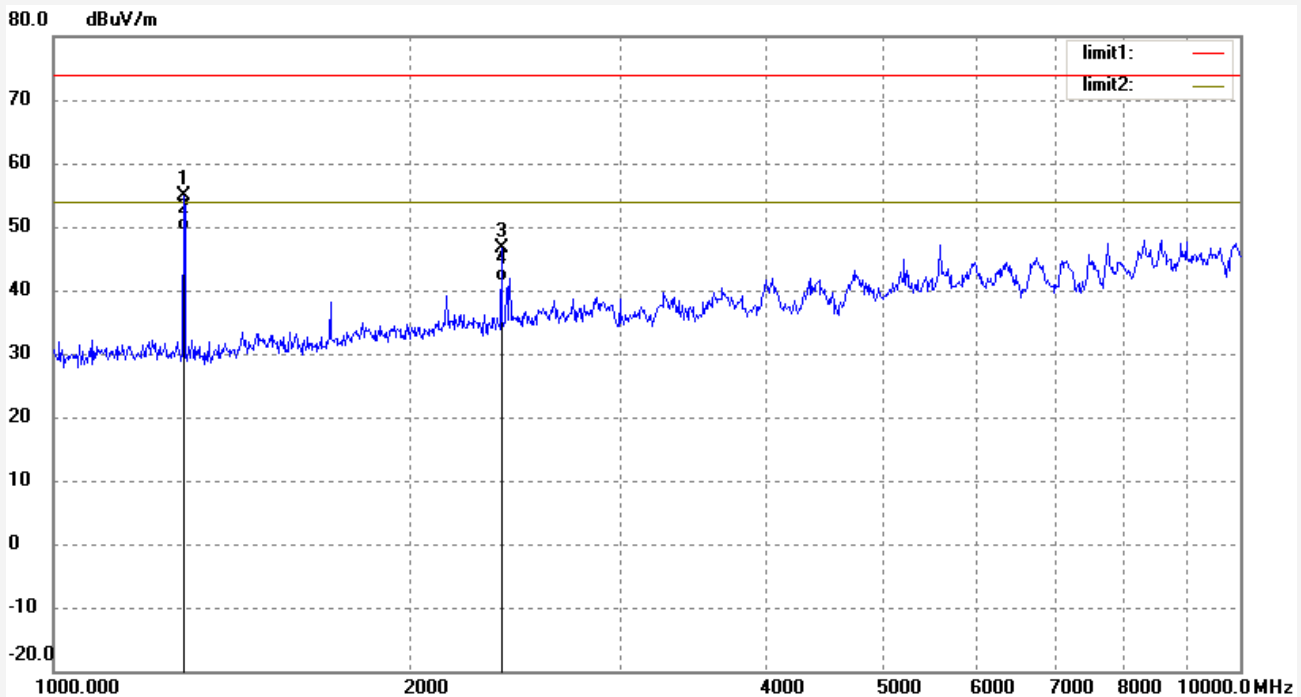

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1287.563	67.06	-12.22	54.84	74.00	-19.16	peak			
2	1287.563	61.54	-12.22	49.32	54.00	-4.68	AVG			
3	2385.852	54.31	-7.56	46.75	74.00	-27.25	peak			
4	2385.852	48.93	-7.56	41.37	54.00	-12.63	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: HP #259
Standard: FCC PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 433MHz
Model: RFM96-433S2(13dBm)
Manufacturer:

Polarization: Vertical
Power Source: DC 3.3V
Date: 2013/12/30
Time: 16:36:33
Engineer Signature: PEI
Distance: 3m

Note:

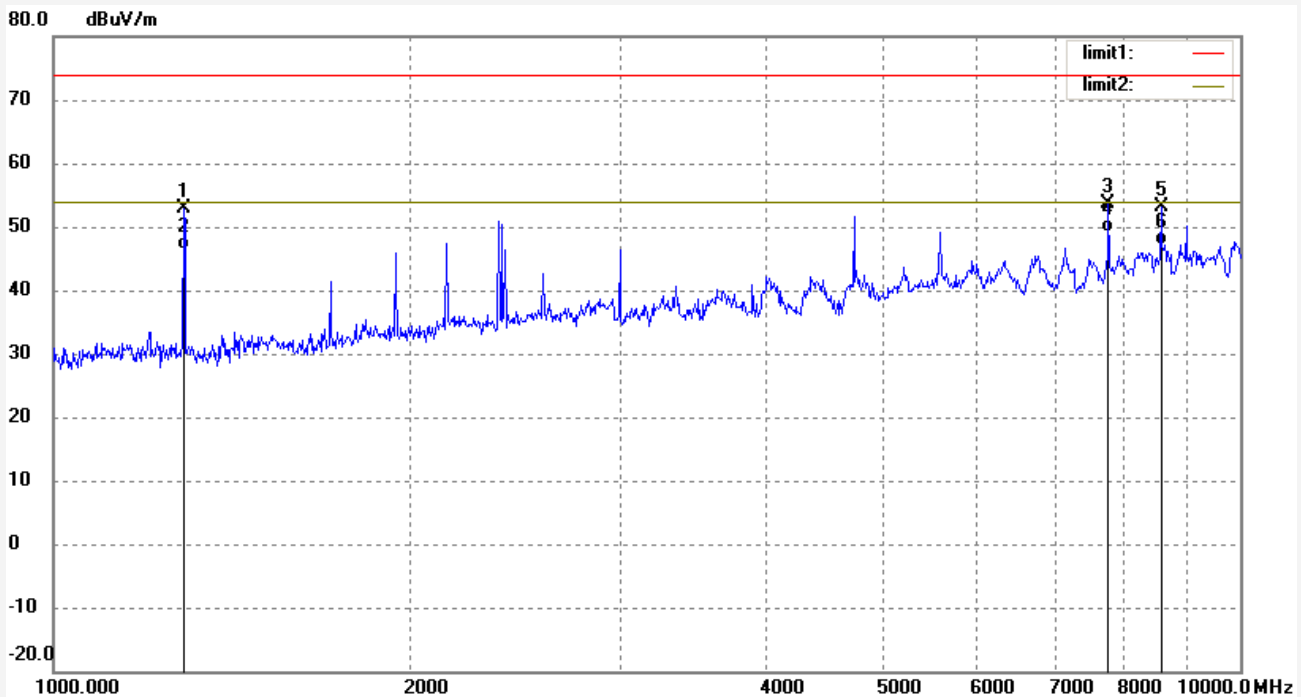

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1287.563	64.99	-12.22	52.77	74.00	-21.23	peak			
2	1287.563	58.67	-12.22	46.45	54.00	-7.55	AVG			
3	7748.624	48.27	5.47	53.74	74.00	-20.26	peak			
4	7748.624	43.54	5.47	49.01	54.00	-4.99	AVG			
5	8580.938	45.46	7.68	53.14	74.00	-20.86	peak			
6	8580.938	39.51	7.68	47.19	54.00	-6.81	AVG			