



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: HP #223
Standard: EN300 220(TX)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 433MHz
Model: RFM98-433S2(13dBm)
Manufacturer:

Polarization: Vertical
Power Source: DC 3.3V
Date: 13/12/30/
Time: 14/59/05
Engineer Signature: PEI
Distance: 3m

Note:

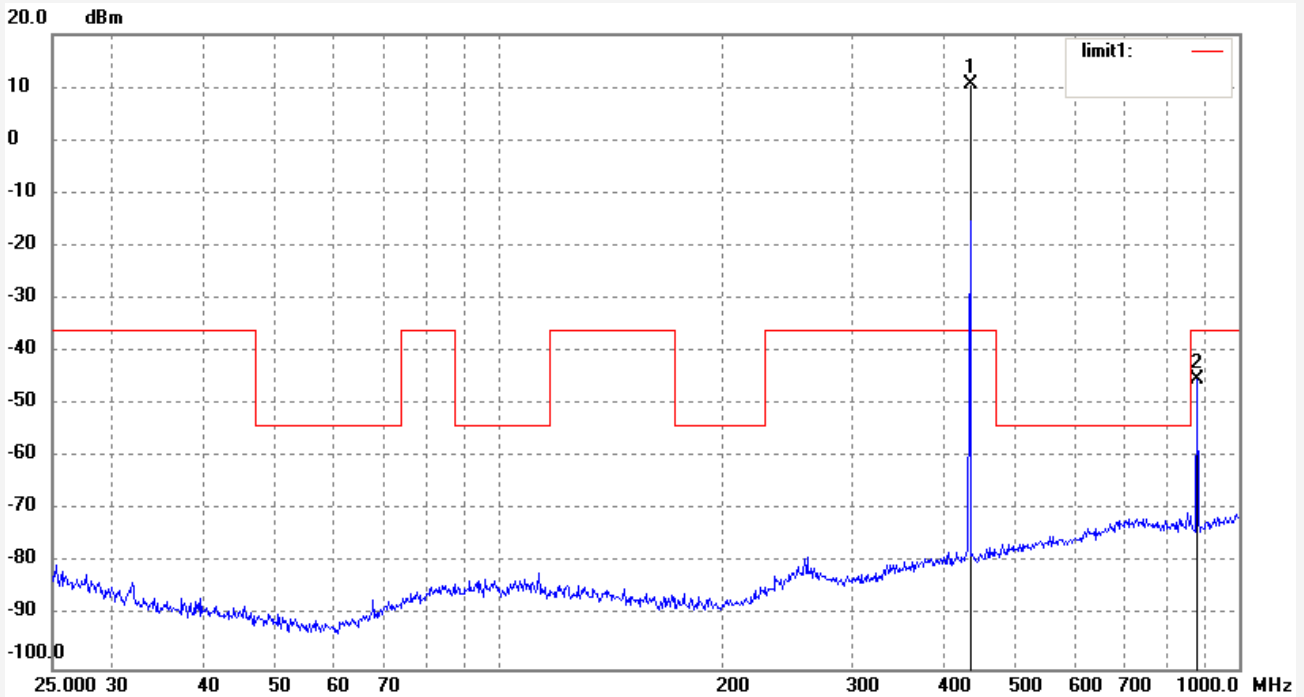

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	433.7194	8.38	2.16	10.54	-36.00	46.54	peak			
2	878.6492	-53.53	8.16	-45.37	-36.00	-9.37	peak			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: HP #224
Standard: EN300 220(TX)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 433MHz
Model: RFM98-433S2(13dBm)
Manufacturer:

Polarization: Horizontal
Power Source: DC 3.3V
Date: 13/12/30/
Time: 15/00/12
Engineer Signature: PEI
Distance: 3m

Note:

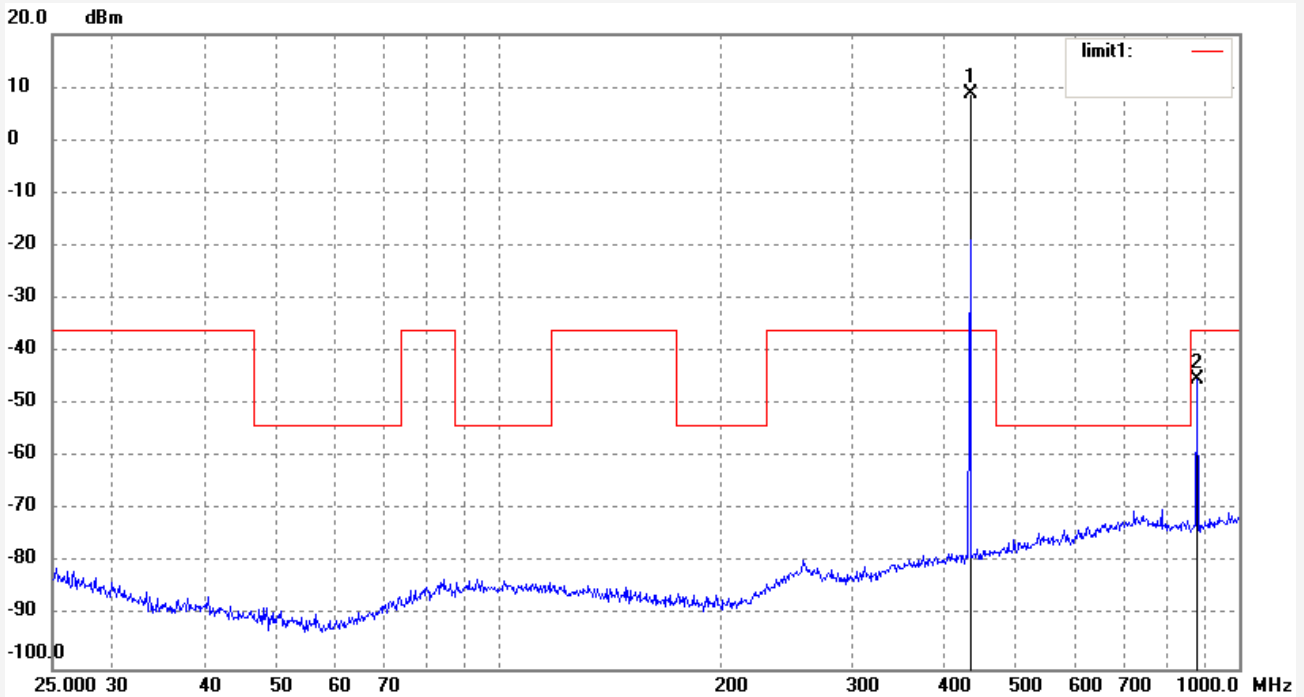

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	433.7194	5.85	3.00	8.85	-36.00	44.85	peak			
2	878.6492	-53.91	8.63	-45.28	-36.00	-9.28	peak			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: HP #244
Standard: EN300 220(TX)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 433MHz
Model: RFM98-433S2(13dBm)
Manufacturer:

Polarization: Vertical
Power Source: DC 3.3V
Date: 2013/12/30
Time: 16:00:41
Engineer Signature: PEI
Distance: 3m

Note:

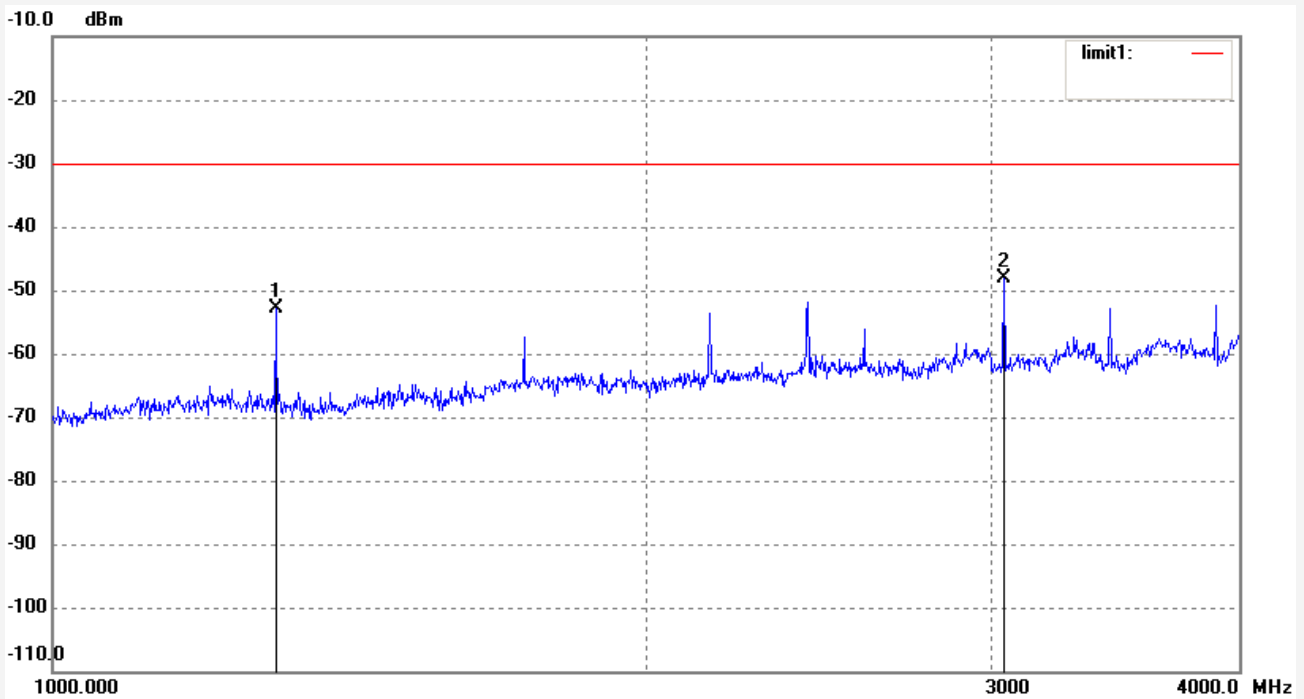

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1297.970	-49.59	-3.31	-52.90	-30.00	-22.90	peak			
2	3039.053	-52.73	4.52	-48.21	-30.00	-18.21	peak			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: HP #245
Standard: EN300 220(TX)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 433MHz
Model: RFM98-433S2(13dBm)
Manufacturer:

Polarization: Horizontal
Power Source: DC 3.3V
Date: 2013/12/30
Time: 16:02:58
Engineer Signature: PEI
Distance: 3m

Note:

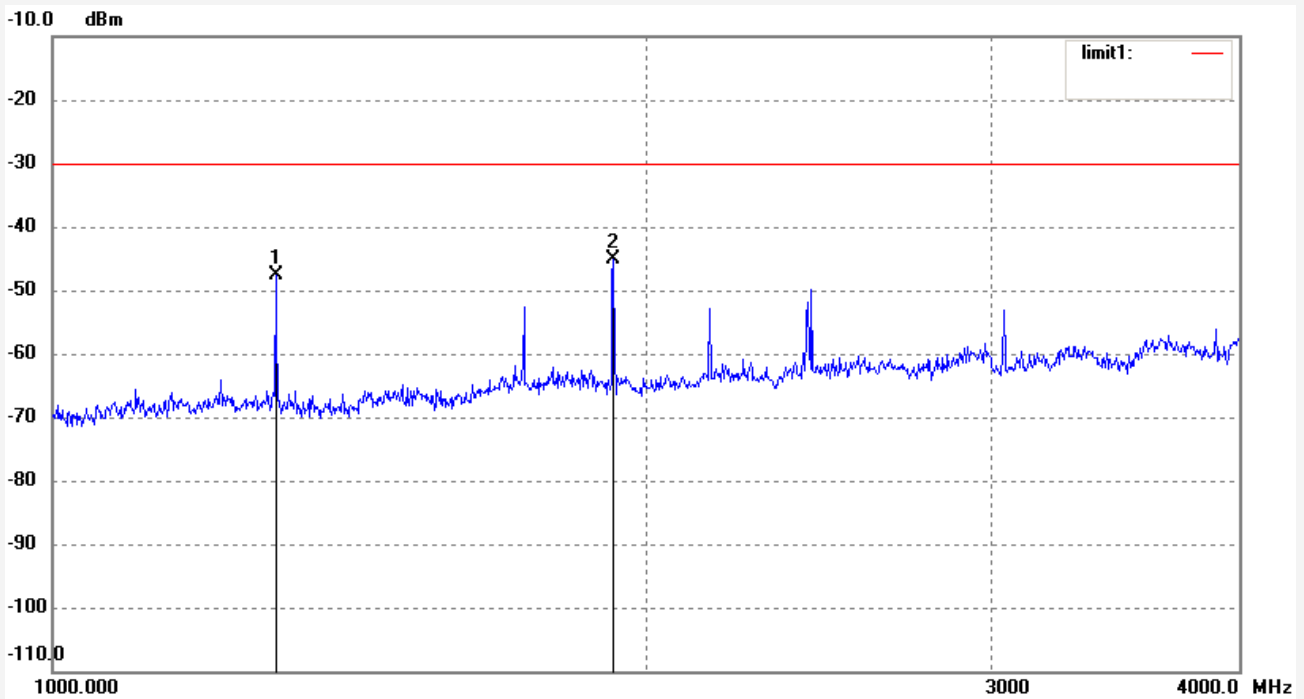

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1297.970	-44.26	-3.31	-47.57	-30.00	-17.57	peak			
2	1926.089	-45.01	-0.19	-45.20	-30.00	-15.20	peak			