



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: HP #282
Standard: EN300 220(TX)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 470MHz
Model: RFM98-470S2(10dBm)
Manufacturer:

Polarization: Vertical
Power Source: DC 3.3V
Date: 2014/03/15
Time: 10:45:33
Engineer Signature: PEI
Distance: 3m

Note: 1#

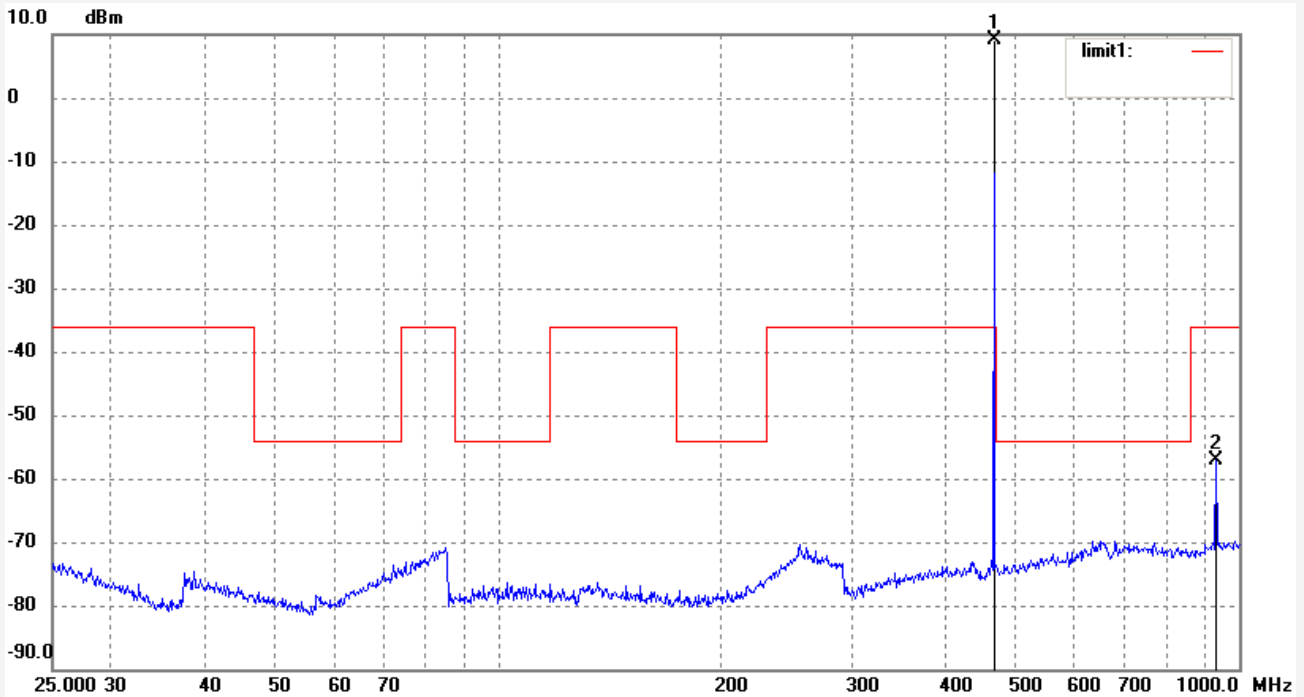

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	469.9972	5.68	3.36	9.04	-36.00	45.04	peak			
2	940.1802	-65.63	8.59	-57.04	-36.00	-21.04	peak			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: HP #283
Standard: EN300 220(TX)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 470MHz
Model: RFM98-470S2(10dBm)
Manufacturer:

Polarization: Horizontal
Power Source: DC 3.3V
Date: 2014/03/15
Time: 10:46:45
Engineer Signature: PEI
Distance: 3m

Note: 1#

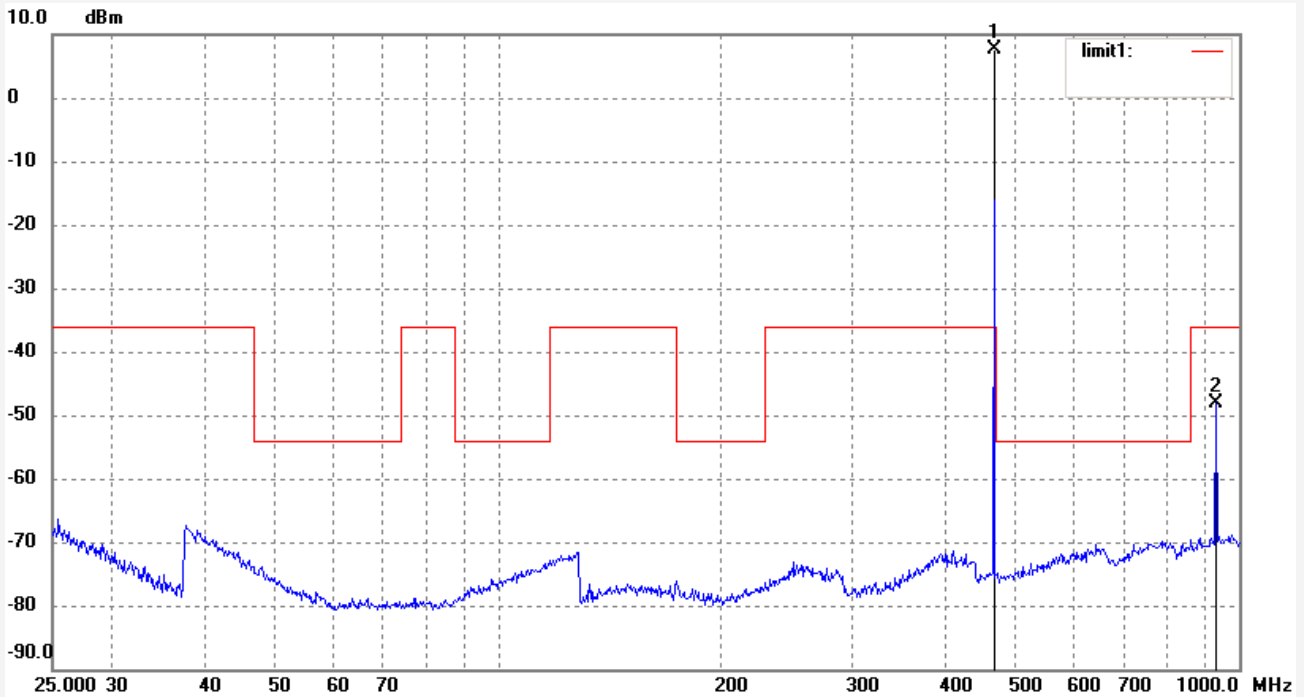

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	469.9972	4.56	3.14	7.70	-36.00	43.70	peak			
2	940.1802	-58.28	10.17	-48.11	-36.00	-12.11	peak			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: HP #300
Standard: EN300 220(TX)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 470MHz
Model: RFM98-470S2(10dBm)
Manufacturer:

Polarization: Vertical
Power Source: DC 3.3V
Date: 2014/03/15
Time: 11:36:07
Engineer Signature: PEI
Distance: 3m

Note: 1#

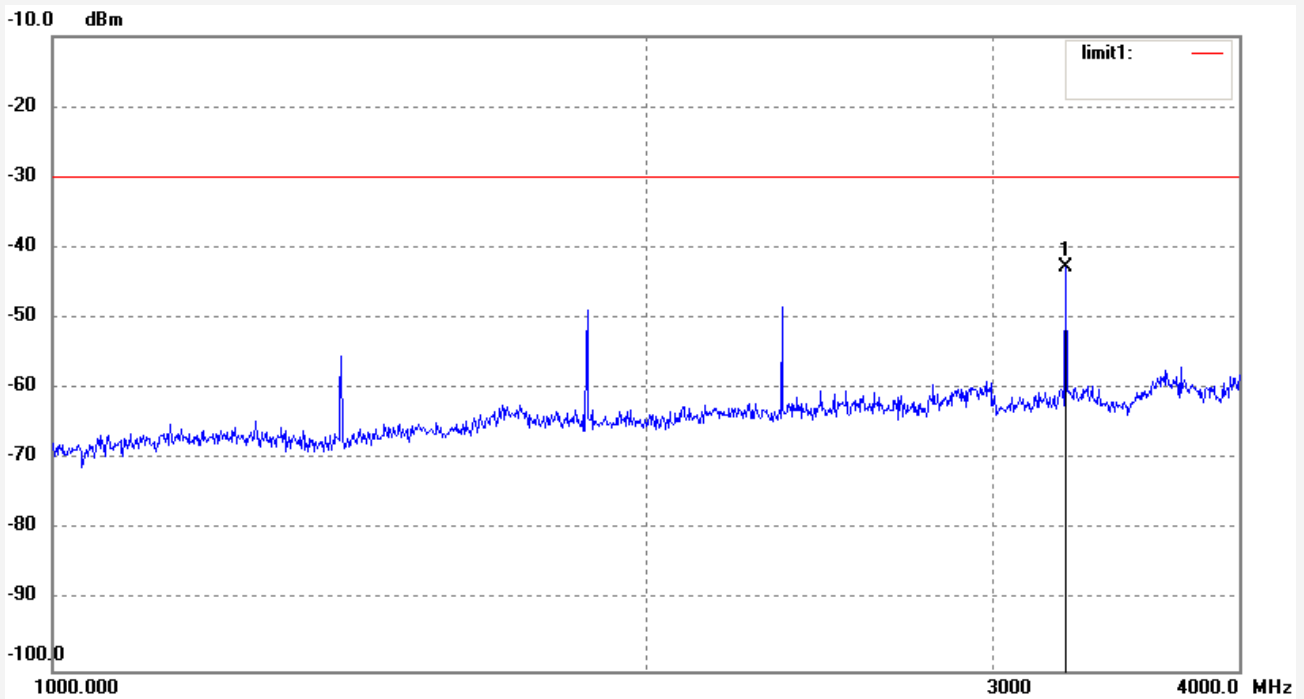

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	3290.641	-47.91	5.17	-42.74	-30.00	-12.74	peak			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: HP #301
Standard: EN300 220(TX)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 470MHz
Model: RFM98-470S2(10dBm)
Manufacturer:

Polarization: Horizontal
Power Source: DC 3.3V
Date: 2014/03/15
Time: 11:37:36
Engineer Signature: PEI
Distance: 3m

Note: 1#

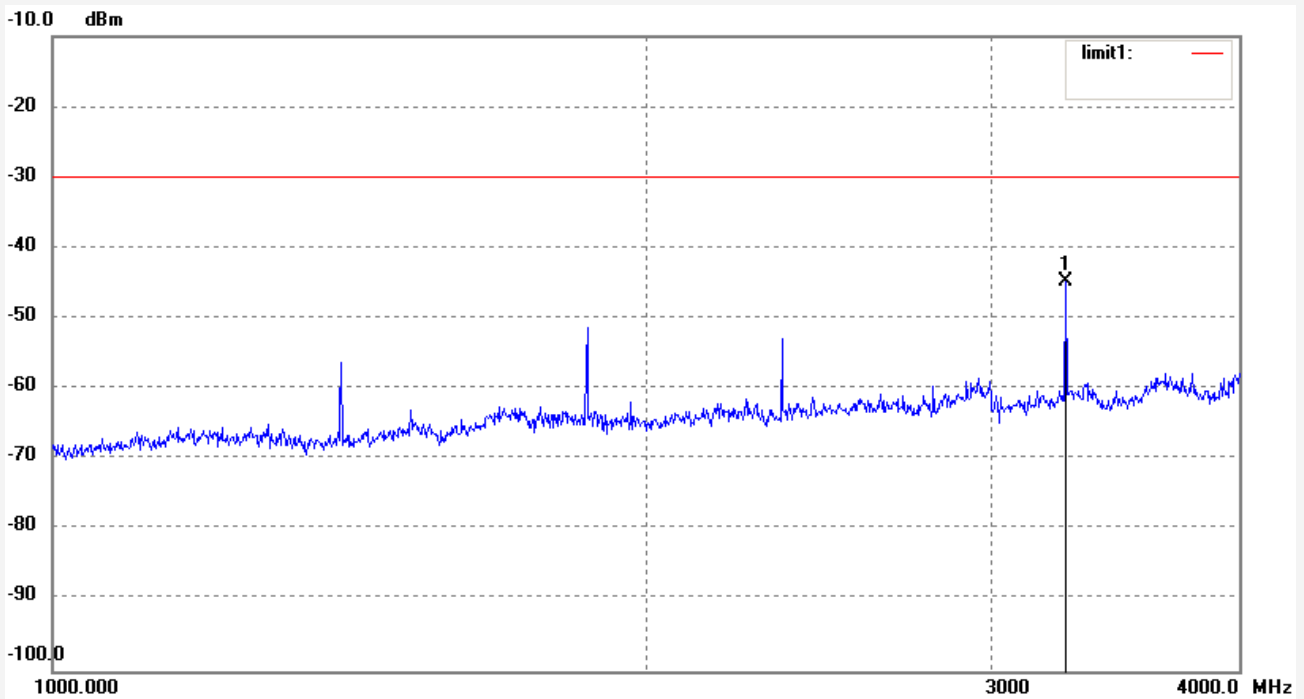

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	3290.641	-49.90	5.17	-44.73	-30.00	-14.73	peak			