



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: HP #324
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 470MHz
Model: RFM98-470S2(5dBm)
Manufacturer:

Polarization: Horizontal
Power Source: DC 3.3V
Date: 2014/03/15
Time: 14:20:24
Engineer Signature: PEI
Distance: 3m

Note: 1#

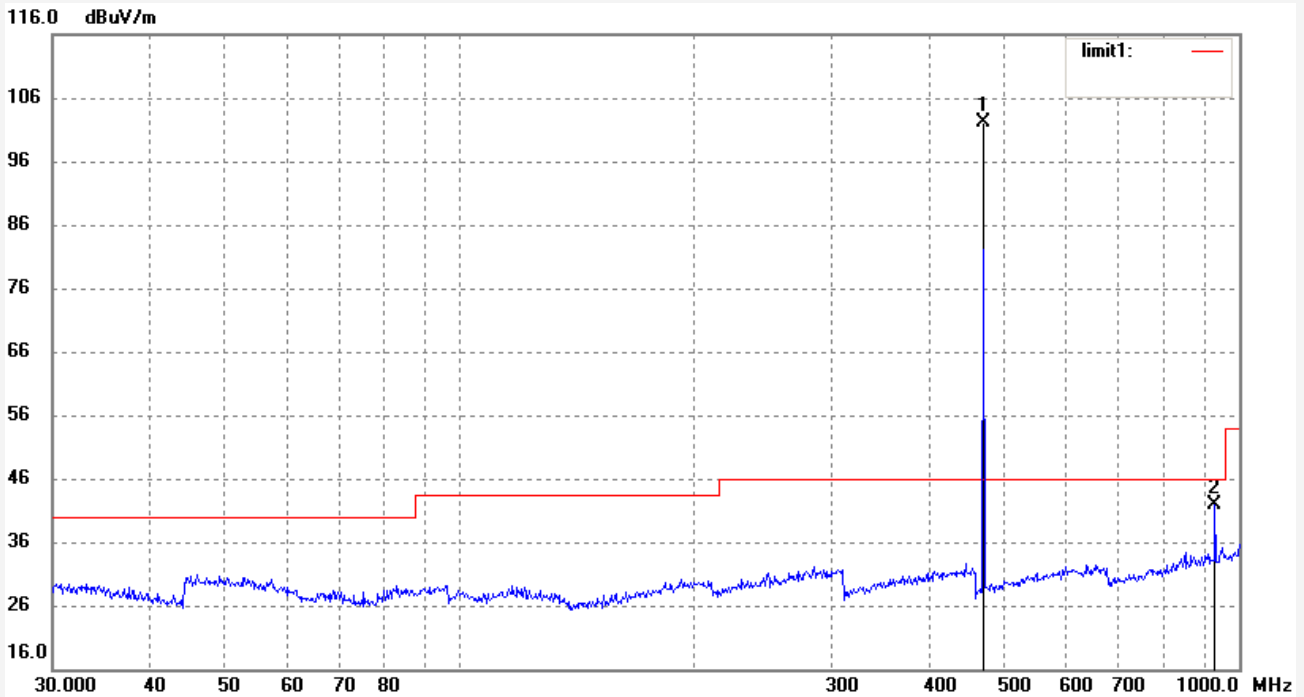

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	469.8129	107.68	-5.51	102.17	46.00	56.17	peak			
2	940.1404	40.05	1.85	41.90	46.00	-4.10	peak			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: HP #325
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 470MHz
Model: RFM98-470S2(5dBm)
Manufacturer:

Polarization: Vertical
Power Source: DC 3.3V
Date: 2014/03/15
Time: 14:21:28
Engineer Signature: PEI
Distance: 3m

Note: 1#

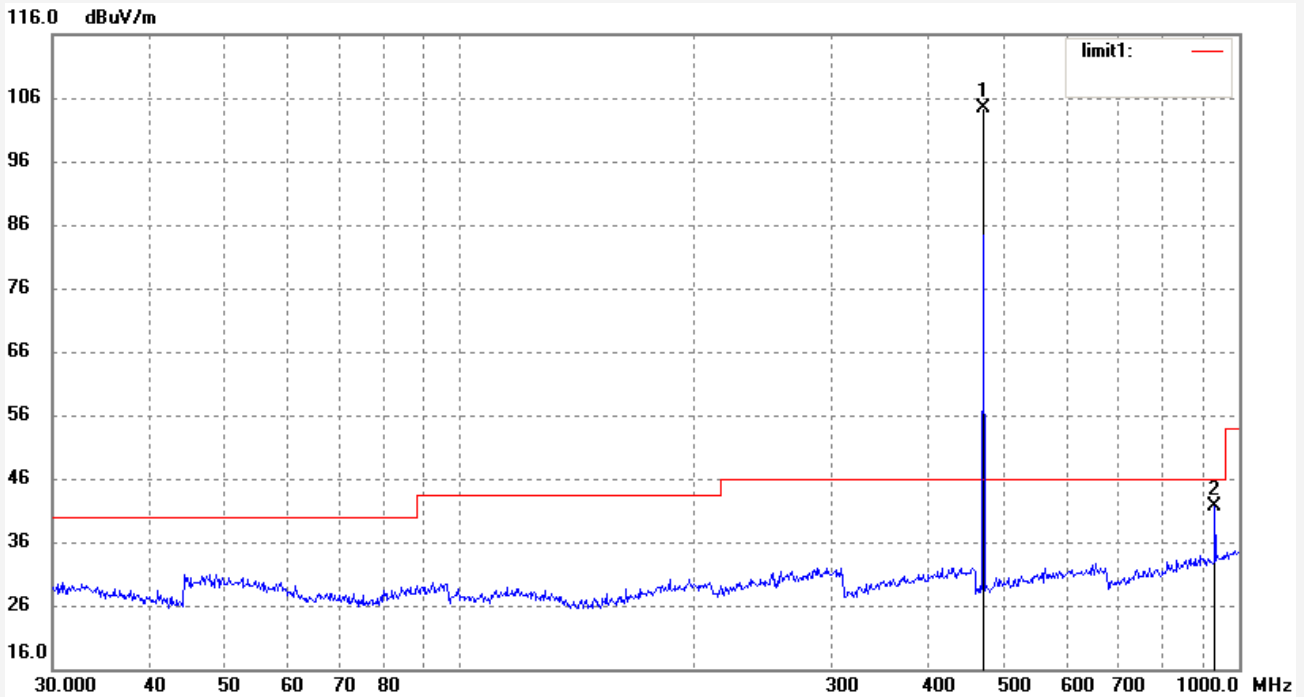

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	469.8129	109.82	-5.51	104.31	46.00	58.31	peak			
2	940.1405	39.85	1.85	41.70	46.00	-4.30	peak			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: HP #342
Standard: FCC PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 470MHz
Model: RFM98-470S2(5dBm)
Manufacturer:

Polarization: Vertical
Power Source: DC 3.3V
Date: 2014/03/15
Time: 15:02:31
Engineer Signature: PEI
Distance: 3m

Note: 1#

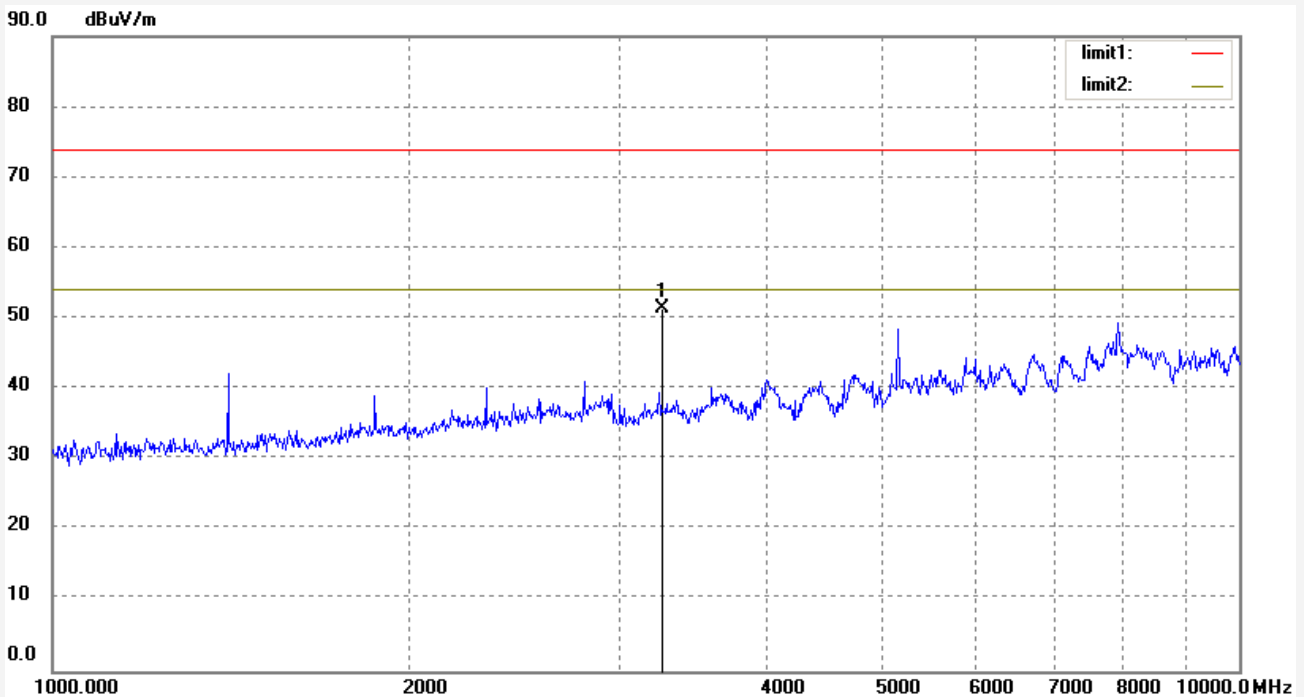

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	3270.739	55.71	-4.30	51.41	74.00	-22.59	peak			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: HP #343
Standard: FCC PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 470MHz
Model: RFM98-470S2(5dBm)
Manufacturer:

Polarization: Vertical
Power Source: DC 3.3V
Date: 2014/03/15
Time: 15:04:00
Engineer Signature: PEI
Distance: 3m

Note: 1#

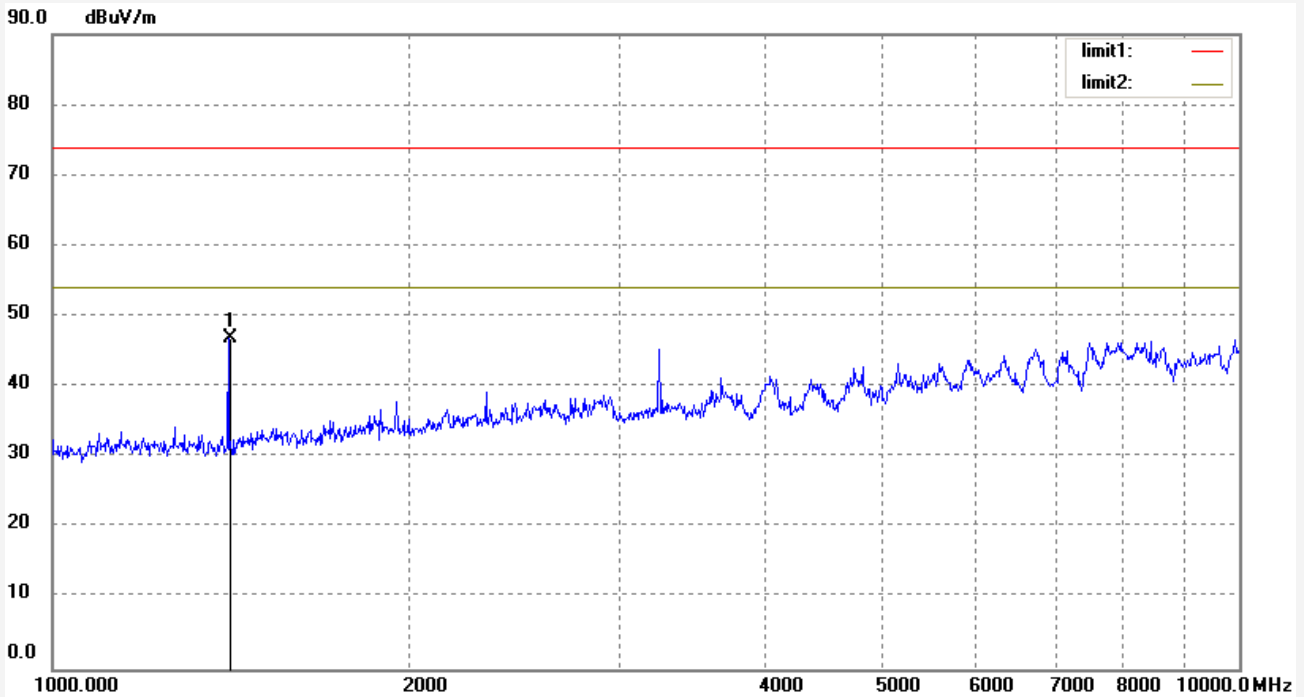

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1410.165	58.60	-11.76	46.84	74.00	-27.16	peak			